on Body:

506

/ SÜD

Holder:

Standards:

Machine

d safety
ments of
plication
ng as all
le of this
e of the
erring to

Bern

ation

Certificate

Certificate No.:

Tes t Re

Appl ican
Certi ifica

Man ufac
test sam

Date of a
Our o rde
T est l abo

T est n num
T est o obje

T ype:

O rder / P
exam ina

B asis of

E xten t of

HS
Sh BC Ba
Aca ghaink (Ch
Acc unt N Branc
Acc unt No. (R
SW count No. (US
WIFT Co o. (E
ode: H

1 De

Th
in
ec
Th
ta
Th
se

2 D
|U
|U
|U
|U
|U
|U

3 Te
3.1 Re
Th
an
Ad
3.2 Tes
3.3.1 Do
–
–
–
3.3.2 Co
–
–
–

4 Inf
4.1 Tes
Sh
No
4.2 Dat
201
4.3 Par
Par

Pa

4.4 Me
|P
|P
|P
|P
|P
|P

5 Fi

5.1 Do
Th
Th
Th

5.2 Co
Fu
Th
for
Th
sto
Be
ba
co
co

S cl
5.
5. 5
5.
5.
5.
5

EN 81-20:2014


Figure 1

Verdict

V,C
It shall be fulfilled if installation at jobsite.

Sub-clause	
	e
5.5.8	
5.9	
5.9.1	
5.9.1.1	
5.9.1.2	
5.9.2	
5.9.2.1	E in p
	Li
	G
5.9.2.1	T a) b) 1) 2)
5.9.2.1.2	T of T co
	U th sh

Sub-clause	S	Verdict
5.9.2.2	B	-
5.9.2.2.1	G	V,T,C The machi brake devi It shall be latio n at jo
5.9.2.2.1.1	T e a b	V,C Fulfilled. E mechanica
5.9.2.2.1.2	T a	-
5.9.2.2.2	E	V,T,M,C It shall be latio n at jo Brake torc provided f requireme Two mech parking arma brake dev
5.9.2.2.2.1	T li a s A b b d lo A	V,C Fulfilled. The brake the shaft c
5.9.2.2.2.2	T dr	-
5.9.2.2.3	T 5. Th a) 5. 1) in 2) Th re b) fo c) br N to d) m	V,T,C

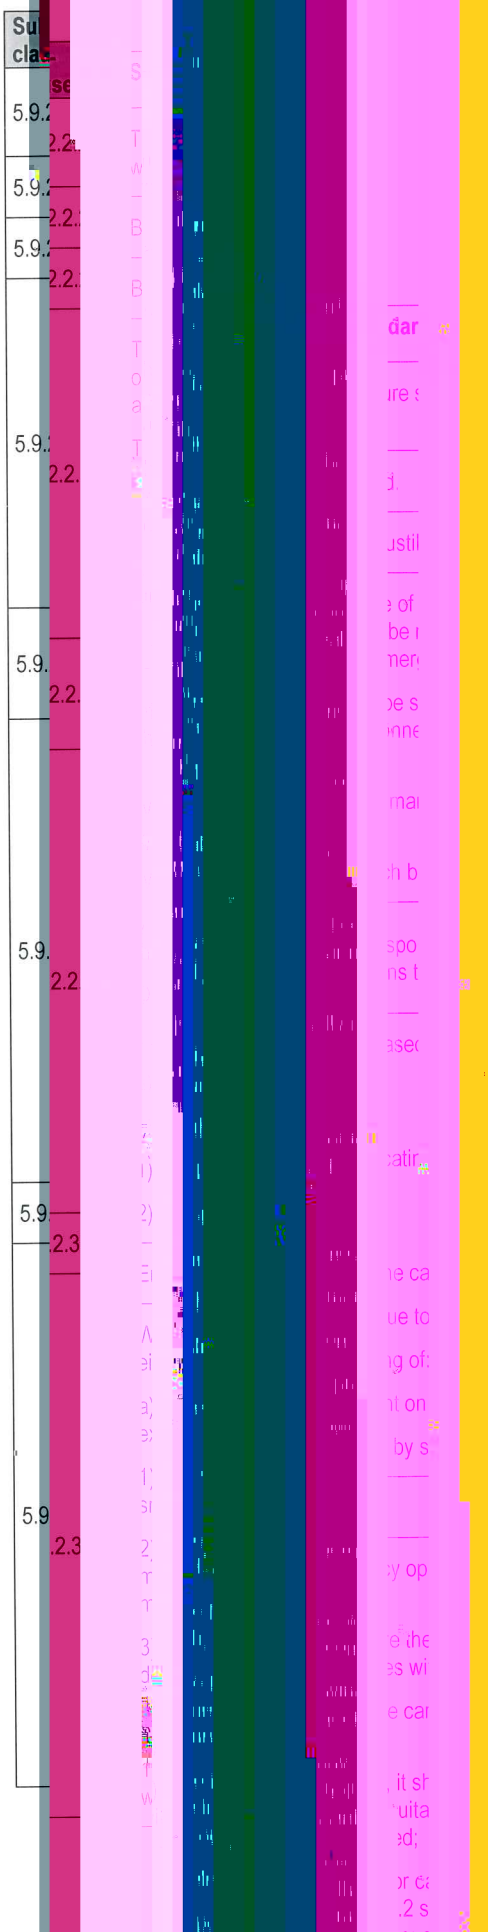

S[illegible] cl[illegible]	[illegible]
[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]
[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]
5.9[illegible]	[illegible]

Sub clau	
5.9.2	
5.9.2	
5.9.2	
Not Veri	tion

5.3 Add nal t

The dit is EN6 4-1.

Duri ne, t rise) wa table:

Du	be
Ra	po
Ra	vo
Ra	re

The st ar cy ol re brak ev r is m ur e. reac g t d ne temp pe orded a at the may be

θ_2 – = k 2

Whe

θ_1 is te n np

mer

θ_2 is te n np

θ_a is te n np

R_1 is re at

R_2 is re nc

k is t rec nc

copp k = 2 al

coefficie

ctor ma te
Industrie
lict
all be fulfill d
n at jobsite
all be fulfill d
n at jobsite
all be fulfill d
at jobsite
/calculatio
e 8 of st
n in the fo
nfrared ra
f the co ve
ce of th is
rature
nce me as

The

		Test data			
Motor	θ_c	8.5°C	R_1	1.26	Ω
	θ_h	12.0°C	R_2	1.71	Ω
Brake	θ_c	8.5°C	R_1	20.65	Ω
	θ_a	12.0°C	R_2	23.00	Ω
Co (fo					

Afte

6 Test

The
esse
refer
data
valid
ty an

A revi
tioned

Tes

Tho

ralf Mühre

Zhiying